

www.powerplus.us



International Division

POWERPLUS GROUP PTE. LTD.
Powerplus Building
39 Ubi Crescent, Singapore 408587
Tel: (65) 63399333
Fax: (65) 63399933
Email: enquiry@powerplus.us

Research & Development Facility

POWERPLUS GROUP INC., U.S.A.
2130 N. Arrowhead Avenue,
San Bernardino, CA 92405, USA
Tel: (1) 909 300 3333
Fax: (1) 909 323 3333
Email: hq@powerplus.us

Distributed By:



WHEEL EXCAVATOR
PP220W-XI ADVANCE

POWERPLUS is the registered TM of POWERPLUS GROUP INC., USA
In the United States of America & Worldwide

All rights of manufacturer and of this book reserved. Unauthorized duplication is a violation of application law.



Advanced multifunctional monitor delivers critical machine data with clear visibility




Pilot-style joystick control levers ensure precise, responsive, and easy operation



Operator-focused cabin design provides superior ergonomics and long-duration comfort



Heavy-duty axle and stabilizer system engineered for maximum durability and stability in demanding conditions

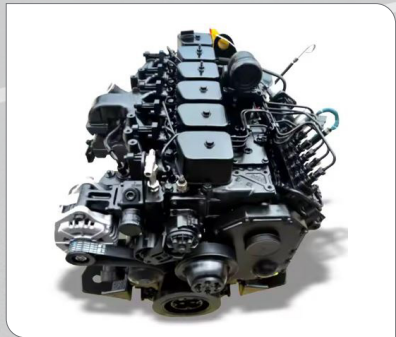




High-performance Cummins engine delivers optimal power output to maximize digging efficiency



Simplified maintenance with direct access to key components and centralized service points

PP220W-XI ADVANCE

MAIN SPECIFICATION			
Operating Weight	kg	21000	
Rated Bucket Capacity	m³	1.1	
Maximum Digging Force	kN	140	
Swing Speed	rpm	12	
Maximum Gradeability	°	25	
Travel Speed	km/h	32	
ENGINE			
Model		Cummins 6BTAA5.9-C205	
Rated Power	HP	205	
Rated Speed	rpm	2000	
HYDRAULIC SYSTEM			
Main Pump		PNM FK	
Swing Pump		PNM FK	
Main Valve		Parker	
Working Pressure	MPa	34	
TRANSMISSION			
Model		ZF 2HL290	
Type		Hydrostatic Powershift	
AXLE			
Type		ZF Wet Brake Axle	
DIMENSIONS			
Overall Length	A	mm	10006
Overall Width	B	mm	2500
Overall Height	C	mm	3515
Counterweight Clearance	D	mm	1309
Minimum Ground Clearance	E	mm	380
Rear Swing Radius	F	mm	2412
Wheelbase	G	mm	2850
Tread	H	mm	1920
WORKING RANGE			
Maximum Digging Height	I	mm	10329
Maximum Dumping Height	J	mm	7397
Maximum Digging Depth	K	mm	6052
Maximum Digging Reach	L	mm	10283
SERVICE REFILL CAPACITIES			
Fuel Tank	L	350	
Hydraulic Oil Tank	L	220	
TIRE			
Size		10.00-20/8	

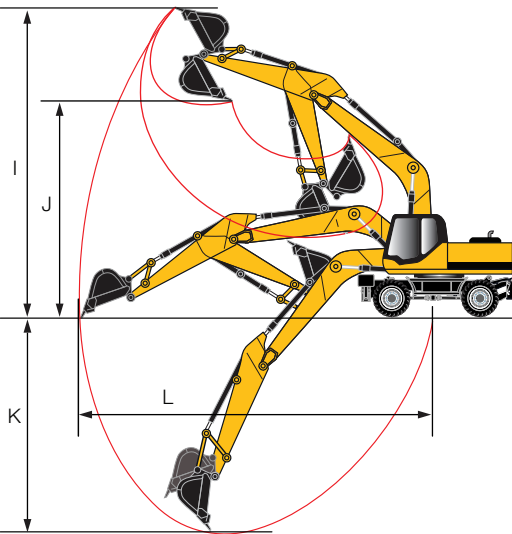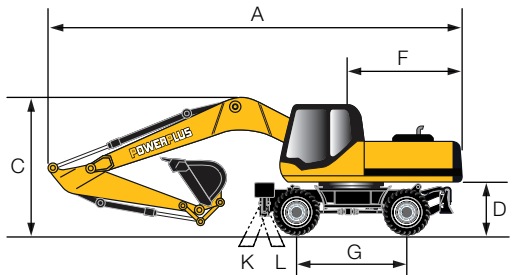

ATTACHMENTS

