





PSLT3500

SELF-LOADING MIXER TRUCK

TECHNICAL SPECIFICATIONS

DIMENSION

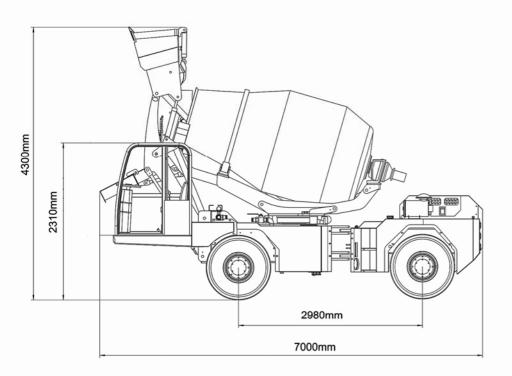

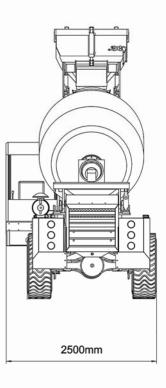

TRANSMISSION

Full hydraulic, 4 wheel drive & 4 wheel steering.

WATER SYSTEM

Two water supply system Total capacity of two connected water tanks is 532L

OPTIONAL Measuring System

Electronic Weighing System

Hydraulic System

Variable pump & Variable Plunger Motor

Pump: FUJI (Japan) Motor: FUJI (Japan)









SELF-LOADING MIXER TRUCK

TECHNICAL SPECIFICATIONS

MODEL		PSLT3500
GVM	kg	15100
Kerb Mass	kg	7400
Overall Length	m	7000
Overall Width	m	2500
Overall Height	m	3250
Gradeability	%	30
Travel Speed	km/h	30
Steering		4WD
ENGINE		
Model		CUMMINS 4BTA3.9-C100
Rated Power	HP	100
Rated Speed	rpm	2200
Emission	·	Euro II
MIXER DRUM		
Capacity	L	5000
Concrete output	m³/batch	3.5
Mixing Speed	rpm	22
Drum Rotation	0	270
Mixing Motor		FUJI (Japan)
Mixing Pump		FUJI (Japan)
BRAKE SYSTEM		
Туре		Hydraulic brakes, hydraulic parking
TIRES		
Size		16/70-20
CABIN		
Туре		An ergonomically designed sound proof cabin, enabling wide operational view, comes standard with designer upholstery, adjustable driver's seat, air con for extensive operations with well deserved comfort.
REFILL CAPACITY		
Fuel Tank	L	165
Hydraulic System		165

www.powerplus.us

International Division

POWERPLUS GROUP PTE. LTD.Powerplus Building 39 Ubi Crescent, Singapore 408587

Tel: (65) 63399333 Fax: (65) 63399933

Email: enquiry@powerplus.us

Research & Development Facility

POWERPLUS GROUP INC., U.S.A.

1521 East Grand Avenue, California 91766, USA Tel: (1) 909 6225 888 Fax: (1) 909 6225 828 Email: hq@powerplus.us

Distributed By: