

www.powerplus.us



International Division

POWERPLUS GROUP PTE. LTD.
Powerplus Building
39 Ubi Crescent, Singapore 408587
Tel: (65) 63399333
Fax: (65) 63399933
Email: enquiry@powerplus.us

Research & Development Facility

POWERPLUS GROUP INC., U.S.A.
2130 N. Arrowhead Avenue,
San Bernardino, CA 92405, USA
Tel: (1) 909 300 3333
Fax: (1) 909 323 3333
Email: hq@powerplus.us

Distributed By:



WHEEL EXCAVATOR

PP80W-XI

POWERPLUS is the registered TM of POWERPLUS GROUP INC., USA
In the United States of America & Worldwide

All rights of manufacturer and of this book reserved. Unauthorized duplication is a violation of application law.



- Ergonomically designed cabin for extended operations with well deserved comfort



- Pilot control levers ensure a smooth & easy operation



- Multifunctional monitor shows data at a glance



- A robust dozer blade and outriggers optimize machine stability and versatility



- Powered by Yanmar engine to maximize digging performance



- Easy maintenance to major components and service points

MAIN SPECIFICATIONS

Operating Weight	kg	8000
Rated Bucket Capacity	m3	0.3
Maximum Digging Force	kN	45
Swing Speed	rpm	12
Maximum Gradeability	°	25
Travel Speed	km/h	30

ENGINE

Model	YANMAR 4TNV98	
Rated Power	HP	60
Rated Speed	rpm	2200
Emission	4 Stroke, In-line, Water Cooled	
Emission	Euro III	

HYDRAULIC SYSTEM

Main Pump	POWERPLUS	
Working Pressure	MPa	20

DIMENSIONS




Overall Length	A	mm	6300
Overall Width	B	mm	2205
Overall Height	C	mm	2850
Counterweight Clearance	D	mm	1010
Minimum Ground Clearance	E	mm	260
Rear Swing Radius	F	mm	1940
Wheelbase	G	mm	2400
Tread	H	mm	1675
Boom Length		mm	3350
Arm Length		mm	1750

WORKING RANGE

Maximum Digging Height	I	mm	6245
Maximum Dumping Height	J	mm	4630
Maximum Digging Depth	K	mm	3820
Maximum Digging Reach	L	mm	6360

TIRES

Size	825-16		
------	--------	--	--

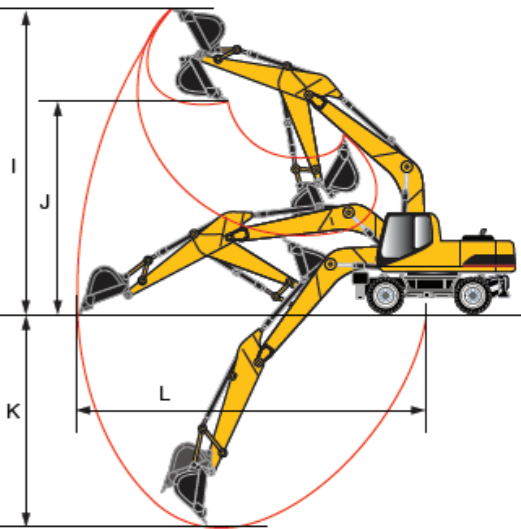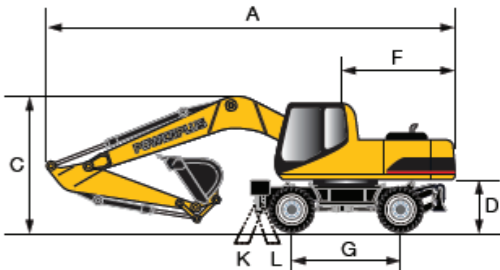

ATTACHMENTS

SHEAR



ROCK BUCKET



GRAPPLE



CLAMSHELL BUCKET



HYDRAULIC BREAKER



BUCKET CRUSHER

