

www.powerplus.us



International Division

POWERPLUS GROUP PTE. LTD.
Powerplus Building
39 Ubi Crescent, Singapore 408587
Tel: (65) 63399333
Fax: (65) 63399933
Email: enquiry@powerplus.us

Research & Development Facility

POWERPLUS GROUP INC., U.S.A.
2130 N. Arrowhead Avenue,
San Bernardino, CA 92405, USA
Tel: (1) 909 300 3333
Fax: (1) 909 323 3333
Email: hq@powerplus.us

Distributed By:



**TRACTOR HEAD
TRUCK
PT680TC-III**

POWERPLUS is the registered TM of POWERPLUS GROUP INC., USA
In the United States of America & Worldwide

All rights of manufacturer and of this book reserved. Unauthorized duplication is a violation of application law.

TECHNICAL SPECIFICATIONS

PT680TC-III		UNIT	
MAIN SPECIFICATION	Kerb Mass	kg	≤9500
	GCW	kg	≤50000
	Overall Length	mm	7500
	Overall Width	mm	2550
	Overall Height	mm	3770
	Wheelbase	mm	3775+1400
	Rear Overhang	mm	725
	Max. Speed	km/h	100
ENGINE	Model		CUMMINS ISME420 30
	Rated Power	HP	420
	Max. Torque	N.M/rpm	2010 / 1200
	Displacement	L	10.8
	Emission		Euro III
TRANSMISSION	Model		FAST GEAR 12JSD200T-B
	No. of Gears		12 Forward & 2 Reverse
AXLE	Front		5.5T (MAN Technology)
	Rear		13T (MAN Technology) Single reduction with Inter-wheel differential
	Ratio		3.7
STEERING	Type		RHD, Integral inner circulation power steering
CLUTCH	Type		ϕ 430mm diaphragm-spring
SUSPENSION	Type		Leaf springs
FUEL	Tank Capacity	L	700+300
KINGPIN	Size		JOST 90#
TIRE	No. of Tires		10 + 1
	Tire Size		12R22.5/18PR
	Axle Drive		6x4
CHASSIS	Frame		850x270/8+4
CABIN	Type		POWERPLUS continental interior styling with air conditioning, double doors.



HID LIGHTS



TIPPABLE CABIN




DASHBOARD WITH REAR VIEW CAMERA



LCD COMBINED INSTRUMENT



CUMMINS ISME 420 30 ENGINE

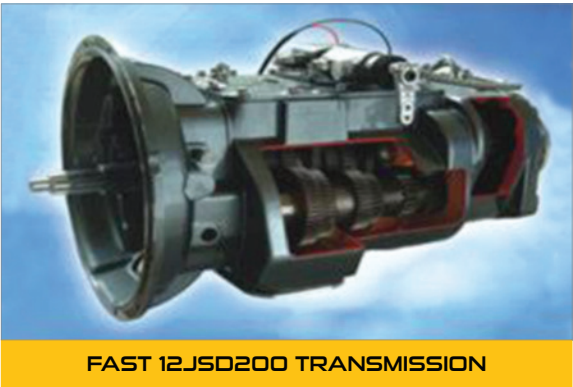

FAST 12JSD200 TRANSMISSION



MAN TECHNOLOGY AXLE



RADIAL TIRES



As our products are upgraded periodically, we reserve all rights to change any information without prior notice.

*ALL PICTURES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY. ACTUAL PRODUCT MAY VARY DUE TO PRODUCT ENHANCEMENT.